

THE

# Barista<sup>TM</sup>

BOX

## New Key-Slot<sup>TM</sup> (patent pending) Set-up Sheet



Photo 1

### 1. (Photo 1)


- BaristaBox<sup>TM</sup> coffee-server as received ( photo 1).
- All **Key-Slot** features pre-applied except Tear-Off collar.
- Remove cap.

### 2. (Photo 2)

- Separate / open bag material layers by "hand-ruffling". This permits a more positive flow of liquid during filling.
- Carefully remove Tear-Off collar and apply to spout.



Photo 2

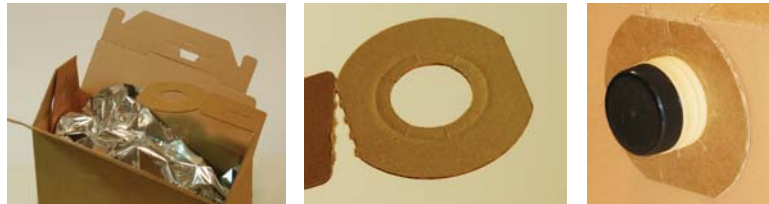


- Replace cap.

### 3. (Photo 3)

- Bring main top flaps together & push hinged panel through opposing cut-out section. Engage (Push-Up) handle locking tab.
- Make sure overlap panel is placed as pictured below.



Photo 3

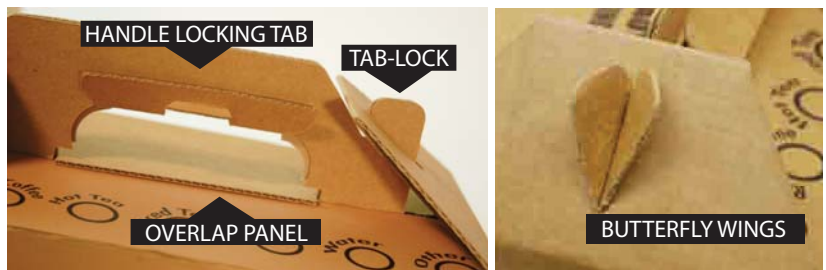

- Position front and rear fold over panels to engage tab-locks. Once fully engaged, separate tab-locks (to form "butterfly wings").
- Store set-up boxes and fill-on-demand.

**TO ORDER: 1-800-645-2700**